


# Mono



## Powerguard insurance global coverage

Within the first year, the output power shall not be less than 96.5% of the minimum output power in CSUN's product datasheet, thereafter the loss of output power shall not exceed 0.68% per year, ending with 80.18% in the 25<sup>th</sup> year.

■ CSUN    ■ Standard warranty

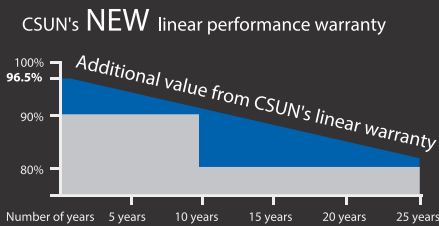

## CSUN300-72M

Standard Solar Product

CSUN300-72M  
CSUN295-72M  
CSUN290-72M  
CSUN285-72M

**15.49%**  
Module efficiency



Industry leading conversion efficiency

**300 W**  
Highest power output



Positive tolerance offer

**10 years**  
Material & workmanship warranty



Passed salt mist & ammonia corrosion, blowing sand and hail testing

**25 years**  
Linear power output warranty



Certificated to withstand wind and snow load



Excellent performance under weak light conditions



Good temperature coefficient for better output in high-temperature regions

- CSUN, established in 2004, is a high-tech corporation with its core business in R&D, manufacturing, and sale of high efficiency silicon based solar cells and modules.
- As one of the leading PV enterprises in the world, CSUN has delivered more than 1 GW solar products, to residential, commercial, utility and off-grid projects all around the world.
- Through strict selection of raw materials, stringent quality control and rigorous test in state of the art facilities in Istanbul, Nanjing and Shanghai, CSUN has always committed to higher efficiency, more stable and better cost performance products.

\* Note: All specifications, warranties, certifications about module of "CSUN" series also apply to that of "SST".

All information and data are subject to change without notice and are provided without liability.



## Electrical characteristics at Standard Test Conditions (STC)

Module	CSUN 300-72M	CSUN 295-72M	CSUN 290-72M	CSUN 285-72M
Maximum Power - P <sub>mpp</sub> (W)	300	295	290	285
Positive power tolerance	0 ~ 3%	0 ~ 3%	0 ~ 3%	0 ~ 3%
Open Circuit Voltage - Voc (V)	44.8	44.6	44.5	44.4
Short Circuit Current - Isc (A)	8.80	8.73	8.67	8.60
Maximum Power Voltage - V <sub>mpp</sub> (V)	36.1	35.9	35.8	35.7
Maximum Power Current - I <sub>mpp</sub> (A)	8.32	8.22	8.11	7.99
Module efficiency	15.49%	15.23%	14.98%	14.72%

Electrical data relates to standard test conditions (STC) : irradiance 1000 W/m<sup>2</sup>; AM 1.5; cell temperature 25°C measuring uncertainty of power is within ±3%. Certified in accordance with IEC61215, IEC61730-1/2 and UL 1703

## Electrical Characteristics at Nominal Operating Cell Temperature (NOCT)

Module	CSUN 300-72M	CSUN 295-72M	CSUN 290-72M	CSUN 285-72M
Maximum Power - P <sub>mpp</sub> (W)	221	217	213	209
Maximum Power Voltage - V <sub>mpp</sub> (V)	33.2	33.0	32.8	32.6
Maximum Power Current - I <sub>mpp</sub> (A)	6.66	6.57	6.50	6.42
Open Circuit Voltage - Voc (V)	41.2	41.1	41.0	40.9
Short Circuit Current - Isc (A)	7.12	7.02	6.92	6.82

Electrical data relates to nominal operating cell temperature (NOCT) : irradiance 800 W/m<sup>2</sup>; wind speed 1 m/s; cell temperature 45°C; ambient temperature 20°C measuring uncertainty of power is within ±3%.

## Temperature Characteristics

Voltage Temperature Coefficient	-0.307%/K
Current Temperature Coefficient	+0.039%/K
Power Temperature Coefficient	-0.423%/K

## Maximum Ratings

Maximum system voltage (V)	1000
Series fuse rating (A)	20
Reverse current overload (A)	27

## Mechanical Characteristics

Dimensions	1956 × 990 × 50 mm
Weight	23.8 kg
Frame	Anodized aluminum profile
Front glass	White toughened safety glass, 3.2 mm
Cell Encapsulation	EVA (Ethylene-Vinyl-Acetate)
Back Sheet	Composite film – black back sheet upon request
Cells	6 × 12 pieces monocrystalline solar cells series strings (156 × 156 mm)
Junction Box	Rated current ≥ 12A, IP ≥ 65, TUV & UL
Cable	Length 900 mm, 1 × 4 mm <sup>2</sup>
Connector	MC 4/ compatible with MC 4

## Packaging


Container 20'	200 pcs
Container 40'	480 pcs
Container 40'HC	516 pcs

## System Design

Temperature range	-40 °C to +85 °C
Hail	Max. diameter of 25mm with 23m/s impact speed
Max. capacity	Snow 5400 Pa, wind 2400 Pa
Application class	A
Safety class	II

## Dimensions

Note: All dimensions in mm (inch).

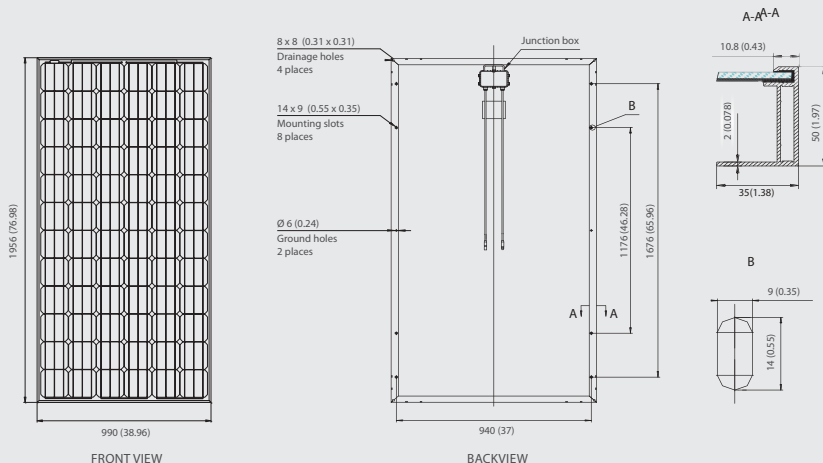

## IV-Curves

