

Green Triplex PM200M00

Mono-Crystalline
Photovoltaic Module



Power Range
200 ~ 220 Wp



Highly Strengthened Design

Module complies with advanced loading tests to meet 5400 Pa loading requirements



PID Free



IP-67 Rated Junction Box

Advanced water and dust proof level

Optional



Resistance to Salt Corrosion and Humidity

Module complies with IEC 61701: Salt Mist Corrosion Testing



BenQ
Solar

Green Triplex PM200M00 (200 ~ 220 Wp)

Electrical Data

Typ. Nominal Power P_N	200W	205W	210W	215W	220W
Typ. Module Efficiency	15.4%	15.8%	16.2%	16.6%	17.0%
Typ. Nominal Voltage V_{mp} (V)	23.9	24.1	24.3	24.4	24.5
Typ. Nominal Current I_{mp} (A)	8.37	8.51	8.65	8.82	8.99
Typ. Open Circuit Voltage V_{oc} (V)	30.4	30.5	30.6	30.7	30.8
Typ. Short Circuit Current I_{sc} (A)	8.76	8.84	8.92	9.00	9.08
Maximum Tolerance of P_N	0 / +3%				

- Above data are the effective measurement at Standard Test Conditions (STC)
- STC: irradiance 1000 W/m², spectral distribution AM 1.5, temperature 25 ± 2 °C, in accordance with EN 60904-3
- The given electrical data are nominal values which account for basic measurements and manufacturing tolerances of ±10%, with the exception of P_N . The classifications is performed according to P_N

Temperature Coefficient

NOCT	46 ± 2 °C
Typ. Temperature Coefficient of P_N	-0.44% / K
Typ. Temperature Coefficient of V_{oc}	-0.30% / K
Temperature Coefficient of I_{sc}	0.06% / K

- NOCT: Normal Operation Cell Temperature, measuring conditions: irradiance 800 W/m², AM 1.5, air temperature 20 °C, wind speed 1 m/s

Mechanical Characteristics

Dimensions (L x W x H)	1318 x 983 x 40 mm, (51.89 x 38.70 x 1.57 in)
Weight	15.4 kg (33.5 lbs)
Front Glass	High transparent solar glass (tempered), 3.2 mm (0.13 in)
Cell	48 monocrystalline solar cells, 156 x 156 mm (6 x 6 in)
Cell Encapsulation	EVA
Back Sheet	Composite film
Frame	Anodized aluminum frame
Junction Box	IP-67 rated with 3 bypass diodes
Connector Type & Cables	YUKITA YS-254/Y S-255 : 1 x 4 mm ² (0.04 x 0.16 inch ²), length : each 1.0 m (39.37 inches)

Operating Conditions

Operating Temperature	-40 ~ +85 °C
Ambient Temperature Range	-40 ~ +45 °C
Max. System Voltage IEC/UL	1000 V / 1000 V
Serial Fuse Rating	15 A
Maximum Surface Load Capacity	Tested up to 5400 Pa according to IEC 61215 (advanced test)

Warranties and Certifications


Product Warranty	Maximum 10 years for material and workmanship
Performance Guarantee	Guaranteed output of 90% for 10 years and 80% for 25 years
Certifications	According to IEC/EN 61215, IEC/EN 61730, UL 1703 guidelines *

- * Please confirm other certifications with official dealers


Packing configuration

Container	20' GP	40' GP	40' HQ
Pieces per pallet	26	26	26
Pallets per container	8	16	32
Pieces per container	208	416	832

Dimensions mm (inch)

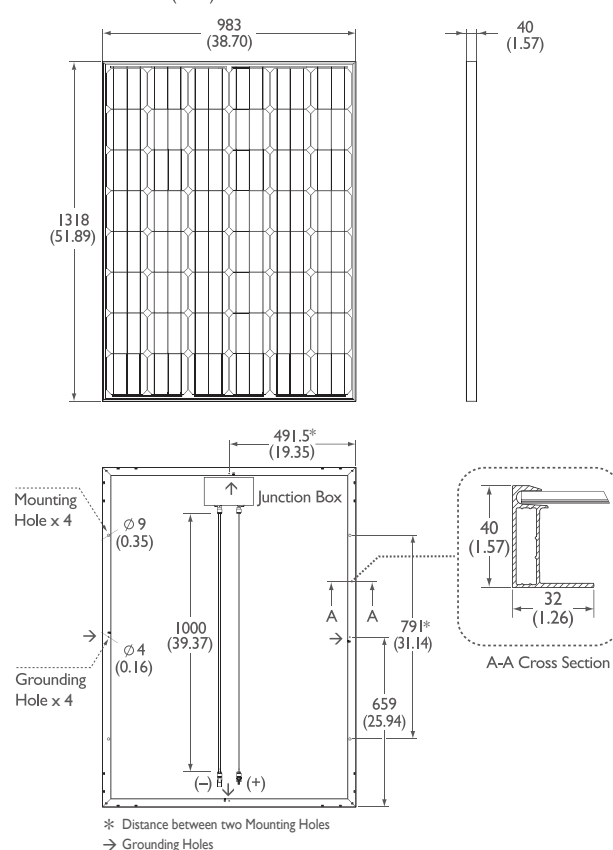

I-V Curve

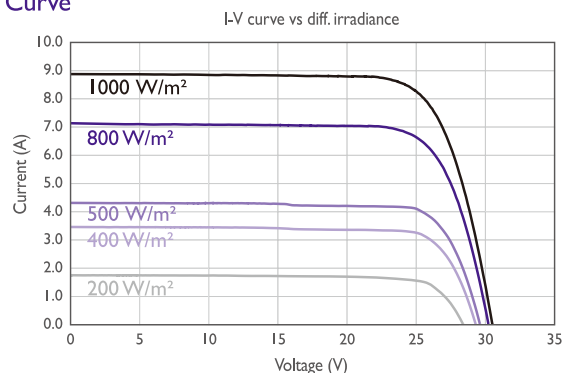

Current/voltage characteristics with dependence on irradiance and module temperature.

Dealer Stamp



AU Optronics Corporation

No. 1, Li-Hsin Rd. 2, Hsinchu Science Park, Hsinchu 30078, Taiwan
Tel: +886-3-500-8899 www.BenQSolar.com



BenQ Solar is a division of AU Optronics This datasheet is printed with Soy Ink
© Copyright January 2014 AU Optronics Corp. All rights reserved. Information may change without notice.



BenQ
Solar