



## TP572M-B

Peak Power:180-200Wp

### MODULE CHARACTERISTICS

- Plus Only Power Tolerance: 0-+3%
- High Mechanical Load Strength:  
Product to Withstand High Wind Loads (2400Pa) and High Snow Loads (5400Pa) in Accordance with IEC 61215
- Fully Automated Production Line:
  - Better Soldering
  - Better Cell Spacing Tolerance:  $\pm 0.3\text{mm}$
  - Better and More Consistent Product Quality
- Black Frame and Black Back Sheet




### ELECTRICAL PARAMETERS\* TP572M-B

MODEL	180	185	190	195	200
Maximum Rated Power at STC	180W	185W	190W	195W	200W
Voltage at Maximum Power (Vmp)	36.3V	36.5V	36.7V	37.0V	37.3V
Current at Maximum Power (Imp)	5.01A	5.11A	5.22A	5.32A	5.42A
Open Circuit Voltage (Voc)	44.7V	44.9V	45.1V	45.3V	45.5V
Short Circuit Current (Isc)	5.40V	5.51V	5.62V	5.73V	5.85V
Module Efficiency $\eta_m(\%)$	14.1	14.5	14.9	15.3	15.7
Power Tolerance	0-+3%				
Temperature Coefficient	Pmax			-0.45%/°C	
	Voc			-0.35%/°C	
	Isc			+0.05%/°C	
	NOCT			45 $\pm$ 2°C	

\* STC: 1000 w/m<sup>2</sup>, 25 °C, AM 1.5

## TECHNICAL DRAWINGS

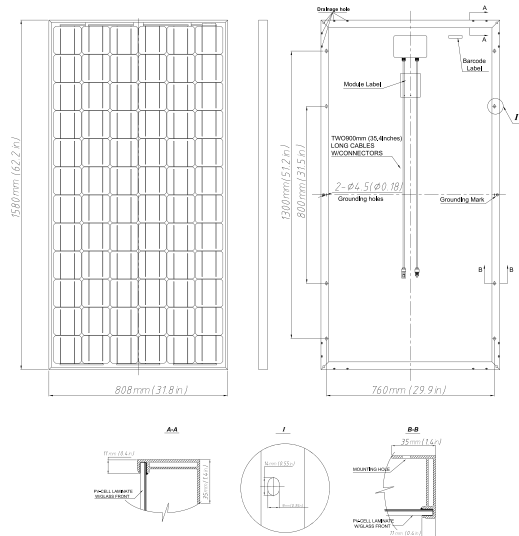


## DIMENSIONS

Cell Type	Mono Crystalline
Cell Dimensions	125 × 125mm(5inch)
Cell Arrangement	72 (6 × 12)
Weight	15kg(33.1lbs)
Module Dimensions	1580 × 808 × 35mm(62.2 × 31.8 × 1.4inch)
Cable Length	900mm(35.4inch)
Cable Cross Section Size	4mm <sup>2</sup> (0.006sq.in)
No. of Bypass Diodes	3/6
Packing Configuration	28pcs/Pallet, 336pcs/20hq, 784pcs/40hq
Frame	Anodized Aluminium Alloy
Junction Box	IP 65 Rate

## WARRANTY

Product Quality Warranty: 10 years

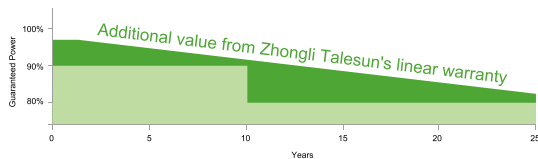


## CERTIFICATIONS & STANDARDS

IEC61215, IEC61703, UL1703, IEC61701(Salt Mist Corrosion Test), IEC62716(Ammonia Corrosion Test)

## I-V CURVE

Output under different radiation and temperature conditions.

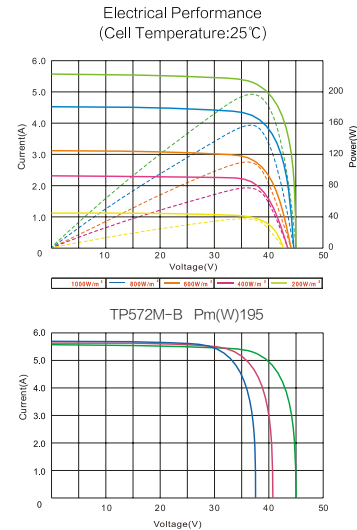

## OPERATING CONDITIONS

Maximum System Voltage	1000V/DC(IEC)
Operating Temp.	-40°C~+85°C
Maximum Series Fuse	10A
Static Loading	5400pa
Conductivity at Ground	0.1 Ω
Safety Class	II
Resistance	≥ 100MΩ
Connector	MC4 Compatible

Performance as Set Forth Below:

- During the first year, TALESUN guarantees the actual power output of the module will be no less than 97% of the labeled power output.
- From year 2 to year 24, the actual annual power decline will be no more than 0.7%; by the end of year 25, the actual power output will be no less than 80% of the labeled power output.